


指針接地電阻計

ANALOG EARTH RESISTANCE TESTER

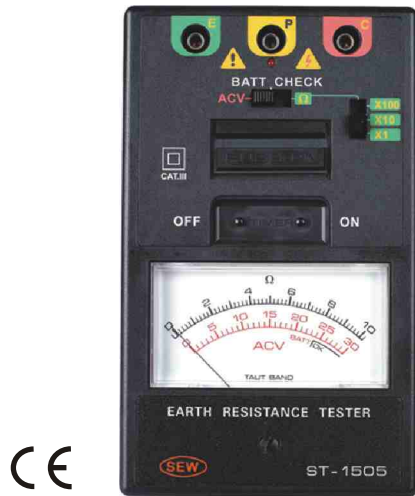

ST-1505

- 吊線式高品質防震表頭。
- 可供量測接地電阻(Ω)和接地電壓(ACV)。
- 在量測接地電阻時，同時壓下"PUSH ON"和"TIMER ON"可作長時間量測，約經5分鐘，會自動關機。
- 使用電池操作。
- 電源多寡指示。
- 符合IEC 1010 CAT II 30V。

電氣規格($23\pm 5^{\circ}\text{C} \leq 80\%RH$)

量測檔位	接地電壓：30V AC(40-500Hz) 接地電阻：0-10 Ω / 0-100 Ω / 0-1000 Ω
準確度	接地電壓： $\pm 2.5\%$ 滿刻度 接地電阻： $\pm 3\%$ 滿刻度
量測系統	820 ± 15 Hz 2mA 定電流
使用電池	1.5V(SUM-3)*6(顆)
外形尺寸	163(長)*100(寬)*50(高)公厘
重量	約 460 克(含電池)
附件	測試線*1(組)：紅色-15 公尺·黃色-10 公尺·綠色-5 公尺 輔助接地棒*2(支) 說明書*1(本) 攜帶箱*1(個) 電池*6(顆)

ANALOG EARTH RESISTANCE TESTER



CE

ST-1505

FEATURES

- High quality Taut Band movement.
- Capable of measuring earth voltage (Vac).
- The timer operates automatically for about three to five minutes when the "PUSH BUTTON SWETCH" and "TIMER ON BUTTON" are pressed together. This will keep test "ON" for the duration of the timer.
- Battery life indication.
- Battery replacement can be easily made without removing the carrying case.
- IEC 1010 CAT II 30V
- **Calibration performed with supplied test leads.**

SPECIFICATIONS

Measuring Ranges	Earth Resistance 0-10Ω/0-100Ω/0-1000Ω Earth Voltage 0-30V AC (40-500Hz)
Accuracy	Earth Resistance ± 3% of full scale Earth Voltage ± 2.5% of full scale
Measuring System	Earth resistance by constant current inverter (Square Signal) 820Hz approx. 2mA.
Power Source	1.5V(SUM-3)×6. Type AA.
Dimensions	163(L)×100(W)×50(D)mm
Weight	460g approx.(battery included)
Accessories	Test leads (AL-36: red-15m yellow-10m green-5m) Auxiliary earth bars. Heavy-duty case Instruction manual Batteries



AL-36 TEL-1505