



# VOLTAGE/ CONTINUITY TESTER



(ACTUAL SIZE)

- Voltage test: 12 to 690V AC/DC (7 LEDs) with indication by buzzer.
- Voltage range: 12V, 24V, 50V, 127V, 230V, 400V, 690V.
- Polarity test: LED +/-.
- Audible continuity test.
- Self-test button to ensure proper function of the device prior to testing.
- Integrated storage clips for test probe.
- Rubberized injection molding.



STANDARD ELECTRIC WORKS CO., LTD.  
www.sew.com.tw

Model  
**VOT-50**

<http://www.51082245.com/sew.htm>

## SPECIFICATIONS

Voltage Test	12 to 690V AC/DC
Voltage Range	12V, 24V, 50V, 127V, 230V, 400V, 690V
Working Frequency	0 to 400 Hz
Voltage Protection	1000V DC / 700V AC
Continuity Range	6k $\Omega$
Resistance range	6k $\Omega$ , 60k $\Omega$ , 300k $\Omega$
Operating Temperature	0 to 40 $^{\circ}$ C
Operating Humidity	80% RH
Probe Distance	19mm apart
Power Source	9V battery $\times$ 1
Dimensions (mm)	206(L) $\times$ 58(W) $\times$ 42(D)mm
Weight	Approx. 210g (battery included)
Electrical safety	IEC 61010-1 CAT III 600V IEC 61243-3
Accessories	Instruction manual, pouch, & battery




# VOLTAGE/CONTINUITY TESTER

## FEATURES

- Voltage test : 12 to 690V AC/DC (7 LEDs) with indication by buzzer.
- Voltage range : 12V, 24V, 50V, 127V, 230V, 400V, 690V.
- Resistance range : 6k $\Omega$ , 60k $\Omega$ , 300k $\Omega$ .
- Test leads positioned at 19mm apart.
- Polarity test : LED +/-
- Audible continuity test
- Self-test button to ensure proper function of the device prior to testing.
- Integrated storage clips for test probe.
- Rubberized injection molding.

### + Detailed Features

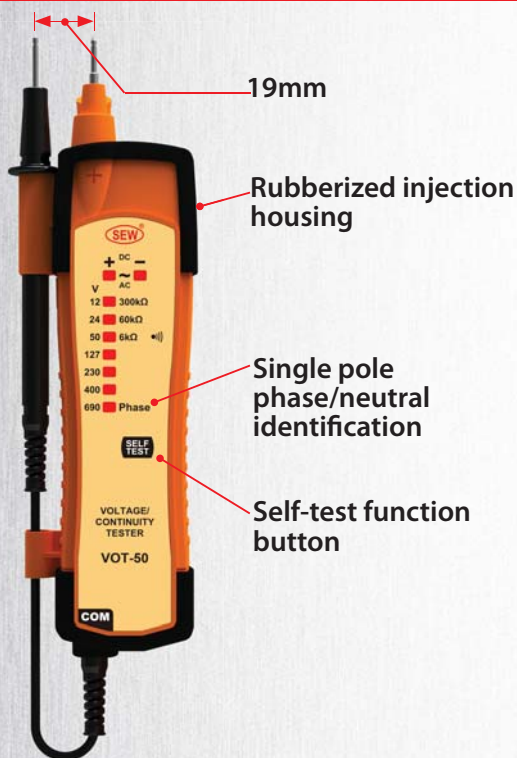

**FRONT VIEW**



**BACK VIEW**

**SIDE VIEW**

**STANDARD ELECTRIC WORKS CO., LTD.**  
www.sew.com.tw

5F., NO.105, Zhongcheng Rd., Tucheng Dist.,  
New Taipei City 23674, Taiwan (R.O.C.)  
TEL: 886-2-22681528  
FAX: 886-2-22681529  
e-mail: sales@sew.com.tw

Model  
**VOT-50**

<http://www.51062245.com/sew.htm>